


### LED T8 Tubes CL

Magnolux LED T8 Tubes are compatible with both, magnetic and electronic ballasts, and are the most efficient and environmentally friendly alternative to traditional fluorescent tubes.

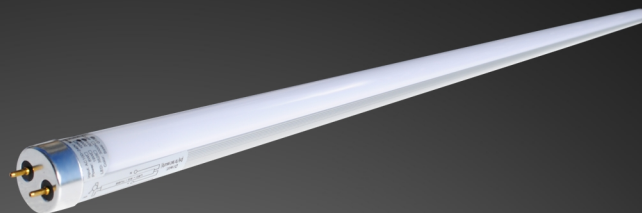

## LED T8 Tube CL - EM21-1200

### HIGHLIGHTS

- » high energy efficiency
- » lifetime up to 25.000 hours
- » EM and CEM-models are compatibel with magnetic and electric ballast

### APPLICATION AREA

Offices, Hotels, Supermarkets, Warehouses, Commercial and Industrial Buildings, Airports, Schools, Hospitals, Parking Decks, etc.



# SPECIFICATIONS

|                         |                                                                              |
|-------------------------|------------------------------------------------------------------------------|
| <b>Artikel Number</b>   | <b>101174</b>                                                                |
| <b>Product Name</b>     | <b>LED T8 Tube CL</b>                                                        |
| <b>Model</b>            | <b>EM21-1200</b>                                                             |
| Socket                  | G13 - 26 mm                                                                  |
| Lumen Output            | 2000 Lumen                                                                   |
| Power Consumption       | 21 Watt                                                                      |
| Input Voltage/Hertz     | 85-265 V / 50-60 Hz                                                          |
| Power Factor            | >0,95                                                                        |
| Light Color             | 5500 Kelvin                                                                  |
| Color Rendering Index   | >80                                                                          |
| LED Type                | SMD                                                                          |
| Beam Angle              | 120°                                                                         |
| Lifetime                | 25000 h                                                                      |
| Environment Temperature | -10°C / +40°C                                                                |
| Material                | Alu silver/PC milky                                                          |
| Product Dimensions      | Ø 26 mm, L 1200 mm                                                           |
| Certificates            | CE, RoHs, EN62471                                                            |
| PCS/Package             | 25                                                                           |
| Packaging Size          | 1246 x 215 x 220 mm                                                          |
| Weight/Packaging        | 18000 g                                                                      |
| Product Info            | compatible with magnetic/electronic ballast, use max. 2 tubes on one ballast |