


## LED T8 Tubes CL

Magnolux LED T8 Tubes are compatible with both, magnetic and electronic ballasts, and are the most efficient and environmentally friendly alternative to traditional fluorescent tubes.

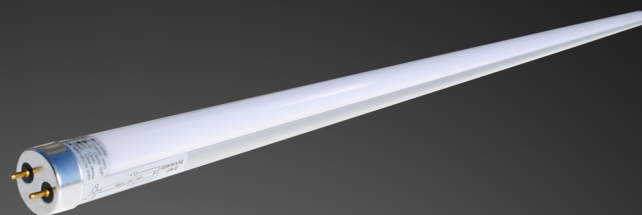

## LED T8 Tube CL - EM25-1500

### HIGHLIGHTS

- » high energy efficiency
- » lifetime up to 25.000 hours
- » EM and CEM-models are compatibel with magnetic and electric ballast

### APPLICATION AREA

Offices, Hotels, Supermarkets, Warehouses, Commercial and Industrial Buildings, Airports, Schools, Hospitals, Parking Decks, etc.

## SPECIFICATIONS

<b>Artikel Number</b>	<b>101369</b>
<b>Product Name</b>	<b>LED T8 Tube CL</b>
<b>Model</b>	<b>EM25-1500</b>
Socket	G13 - 26 mm
Lumen Output	2100 Lumen
Power Consumption	25 Watt
Input Voltage/Hertz	85-265 V / 50-60 Hz
Power Factor	>0,95
Light Color	4000 Kelvin
Color Rendering Index	>80
LED Type	SMD
Beam Angle	120°
Lifetime	25000 h
Environment Temperature	-10°C / +40°C
Material	Alu silver/PC milky
Product Dimensions	Ø 26 mm, L 1500 mm
Certificates	CE, RoHs, EN62471
PCS/Package	25
Packaging Size	1540 x 215 x 220 mm
Weight/Packaging	22000 g
Product Info	compatible with magnetic/electronic ballast, use max. 2 tubes on one ballast

